


xylem

Hydronic Balancing Solutions

The perfect balance of
adjustability and efficiency

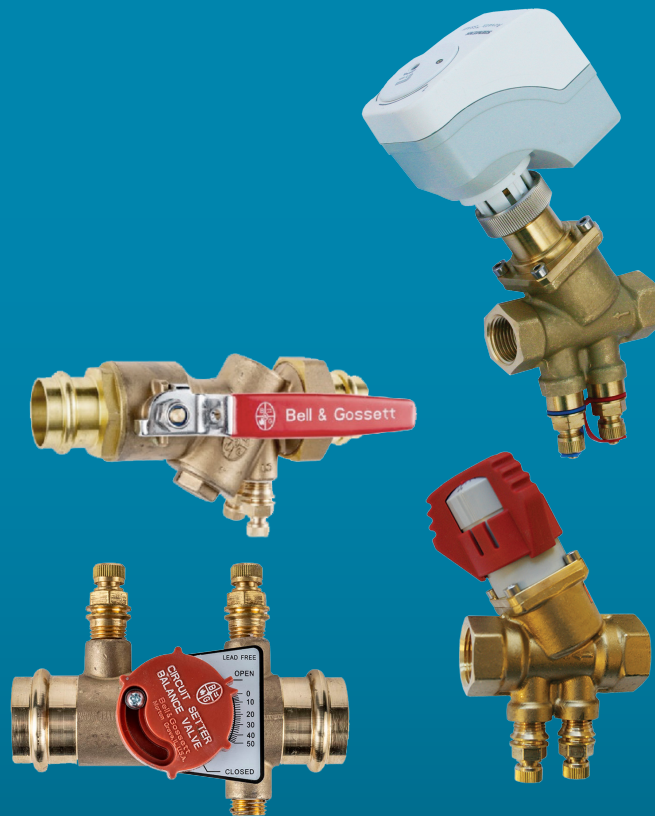


Featuring press connect fittings. Faster. Easier. Safer.



The one stop to find your perfectly balanced solution

Xylem's Bell & Gossett hydronic balancing solutions give you the perfect balance of adjustability and efficiency.

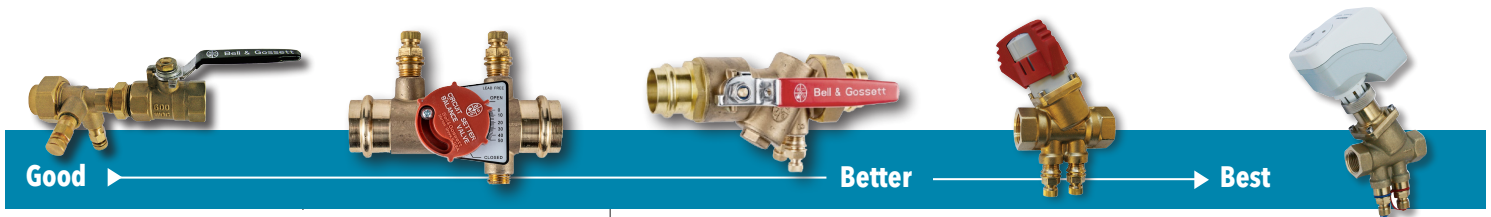





- **Optimized system efficiency** reduces energy and operating costs while increasing comfort
- **Field adjustability** for precise control when and where you need it
- **Control flows** independent of fluctuating system pressures (pressure independent valves only)
- **Broad product range and sizes** (1/2" – 20") provide a solution to fit any system needs
- **Complete coil hook-up kits** available for ease of installation and serviceability



Pressure dependent		Pressure independent		
<p>Venturi Ball or Butterfly Valve Combination</p> <p>Provides venturi flow accuracy with a standard valve for flow control.</p>	<p>Circuit Setter® Plus Calibrated Balance Valve</p> <p>Externally field-adjustable manual balance valve – the industry standard.</p>	<p>Circuit Sentry® Flow Limiting Valve</p> <p>Automatically maintains set flow rate for improved system efficiency.</p>	<p>Circuit Sentry Flo-Setter II Limiting Valve</p> <p>Externally field-adjustable automatic valve for specific flow requirements. Set to the desired GPM on the handle.</p>	<p>Ultra Setter (PICV)</p> <p>Field-adjustable control valve with 100% authority – the ultimate in system balance and efficiency.</p>

Balance valves	Features	Pressure dependent	Field adjustable	Constant flow	Pressure independent	Automatic temperature control
<p>Ultra Setter and Ultra Setter Compact (PICV)</p> <p>Field-adjustable control valve with 100% authority – the ultimate in system balance and efficiency.</p> <p>Size range: 1/2" – 6" Flow range: 0.13 GPM – 880 GPM Sweat (female) NPT (male & female) Press connect ANSI Class 150/250# Flange</p> 	<ul style="list-style-type: none"> • Full modulating, on-off, or tri-state control valve with 100% authority • Automatically maintains a constant required flow rate despite changes in system pressure • Eliminates valve hunting, improving system efficiency • Auto-adjust, pressure independent control valve • Maintains desired flow rate +/-5% • Reduces design, installation and commissioning time • Lowers energy costs and ensures better comfort • Brass models 1/2" – 2" available with and without isolation valve 		✓	✓	✓	✓
<p>Circuit Sentry Flo-Setter II</p> <p>Externally field-adjustable automatic valve for specific flow requirements.</p> <p>Size range: 1/2" – 2" Flow range: 0.26 GPM – 45.57 GPM NPT (female)</p> 	<ul style="list-style-type: none"> • GPM scale on the handle • Keeps constant fluid flow, automatically adjusting for fluctuating pressure conditions • External locking handle allows for easy on-site flow adjustment without additional tools • Quick and easy selection as only flow data is required • Flexibility if the system is modified after installation • Integral Class IV shut-off • Isolation valve option available 		✓	✓	✓	

Bell & Gossett offers a complete array of balancing solutions to fulfill all your needs

Balance valves	Features	Pressure dependent	Field adjustable	Constant flow	Pressure independent	Automatic temperature control
<p>Circuit Sentry Automatically maintains set flow rate for improved system efficiency.</p>  <p>Size range: 1/2" - 2" Flow range: 0.33 GPM - 150 GPM</p>  <p>Size range: 2 1/2" - 20" Flow range: 15 GPM - 7,200 GPM</p>	<ul style="list-style-type: none"> Prevents branch overflows, automatically adjusting for fluctuating pressure conditions Unique diaphragm pressure control element allows one cartridge for most systems Large open flow path for clog free operation Multiple connections: <ul style="list-style-type: none"> Union - upstream (1/2" - 2") Sweat (female), NPT (male & female) and press connect (1/2" - 2") Flanged (2 1/2" - 20") No requirement on pipe length before and after the valve for easier application and piping Integral isolation valve 			✓	✓	
<p>Circuit Setter Plus Externally field-adjustable manual balance valve – the industry standard</p>  <p>Size range: 1/2" - 3" Flow range: 0 GPM - 375 GPM</p>  <p>Size range: 2 1/2" - 12" Flow range: 8 GPM - 7,200 GPM</p>	<ul style="list-style-type: none"> Calibrated accurate flow control and measurement Pre-balance design capability Memory stop indicator Integrated valved readout ports Optional drain valve available Positive shut-off Multiple connections: <ul style="list-style-type: none"> Union - upstream (1/2" - 2") Sweat (female), NPT (male & female) and press connect (1/2" - 2") Flanged and grooved (2 1/2" - 12") Bi-directional (1/2" - 3") 	✓	✓			
<p>Model MV Venturi Valves Provides venturi flow accuracy with a standard valve for flow control.</p>  <p>Size range: 1/2" - 2" Flow range: 0.3 GPM - 68 GPM</p>  <p>Size range: 2 1/2" - 12" Flow range: 30 GPM - 9,700 GPM</p>	<ul style="list-style-type: none"> Efficient Venturi design provides for accurate flow measurement Balances flow with minimal pressure loss Standard port ball or butterfly valve with memory stop indicator Multiple connections: <ul style="list-style-type: none"> Union - upstream (1/2" - 2") Sweat (female), NPT (male & female), and press connect (1/2" - 2") Flanged, grooved and weld (2 1/2" - 12") 	✓	✓			

Trust the name that set the standard in the HVAC industry – Bell & Gossett.

For over 100 years Bell & Gossett has brought you the most reliable and innovative products for hydronic, HVAC and plumbing systems. From pumps and heat exchangers, to air management systems and valves, Bell & Gossett knows what you need to get the job done right the first time and provide lasting value.

Your local Bell & Gossett representative is an experienced professional with a wealth of technical expertise. Because they know systems from design to operation, they can give you the advice and support you need to successfully install, operate and maintain your hydronic systems.


To find a Bell & Gossett representative, visit www.bellgossett.com/sales-service

Coil kits

Bell & Gossett Coil Kits and balancing solutions make selection, ordering, and installation a breeze for the engineer, customer, installer, and help reduce field problems during and after system commissioning. We offer a number of ways of controlling flow to optimize the efficiency of the circuits and total HVAC system and a solution to your balancing problem.

Bell & Gossett Coil Kit benefits


- Optimizes the coil's heat transfer efficiency
- Quick installation
- Easy commissioning
- Easy serviceability
- Flexibility
- Customizable
- Trusted quality
- Quick lead times

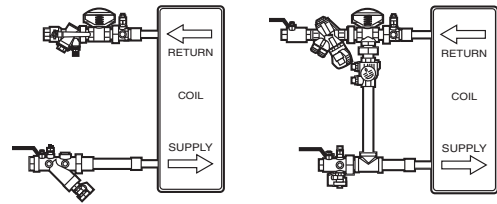

Coil supply line options

Union Ended Ball Valve /Y-Strainer (Model UBY)


- Helps remove the sediment in the water that can settle inside the coil which affect heat transfer and efficiency
- Built-in isolation valve allows for easy serviceability
- Ability to accommodate a 3-way control valve
- Drain valve included (1/2" – 2")
- Includes a pressure/temperature port
- Customized configurations available
- Y-strainer with or without butterfly valve available up to 8" with optional accessories

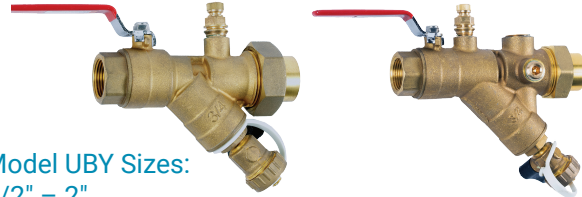

Model UBY Sizes:
1/2" – 2"

Union Ended Ball Valve (Model UBV)

- Built-in isolation valve allows for easy serviceability
- Drain valve included
- Includes a pressure/temperature port
- Customizable



Model UBV
Sizes: 1/2"
– 2"




Flanged Y-Strainer
Sizes: 2 1/2" – 8"

Coil return line options

Union Accessory (Model UA)

- Union ended for easy serviceability
- Includes an air vent to help remove trapped air in the coil
- Includes a pressure/temperature port
- Customizable



Model UA
Sizes: 1/2" – 2"

Bypass control valve options

When required, any of our balance/flow limiting valves or kit components can be utilized as your bypass control valve. The chosen bypass valve will be packaged and shipped with your other valves to help ease installation and commissioning.

Hose kit assemblies

We can assemble your hoses to the supply and return side valves prior to shipment. **Custom kit configurations available on request.**



Flow limiter, balancing valve, and accessory options

- Extended handles for valves (all except Circuit Setter Plus)
- Extended pressure/temperature ports
- Extended drain valves
- Extended air vents
- 12", 18", 24" and 36" stainless steel hoses (custom sizes available also – 6" length minimum)



Learn more about
Hydronic Balancing Solutions

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, Illinois 60053

Phone: (847) 966-3700
Fax: (847) 965-8379
www.xylem.com/bellgossett

This information is subject to change without notice. All information presented herein is believed reliable and in accordance with accepted engineering practices. Xylem makes no warranties as to the completeness of this information. Users are responsible for evaluating individual product suitability for specific applications. Xylem assumes no liability whatsoever for any special, indirect or consequential damages arising from the sale, resale or misuse of its products.

© 2025 Xylem, Bell & Gossett and ecocirc are registered trademarks of Xylem Inc. or one of its subsidiaries. All other trademarks or registered trademarks are the property of their respective owners.

A-509H 8/2025

xylem
Let's Solve Water