Honeywell

RP913A
Load Analyzer

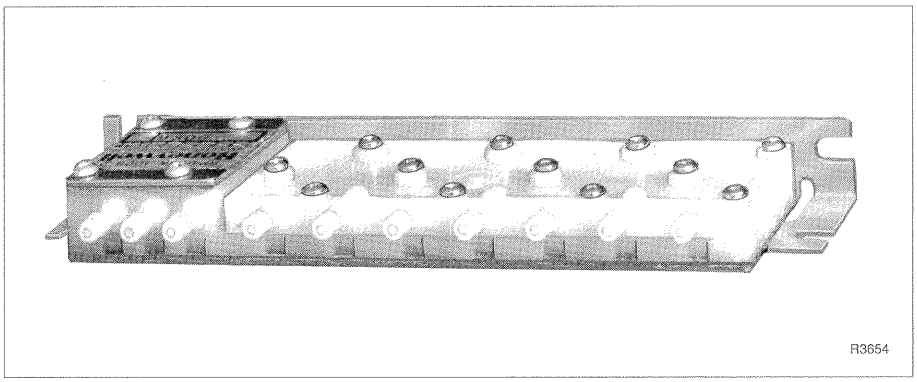

General

The RP913A is a diaphragm logic pressure selector used in pneumatic control applications to select the highest and/or lowest branch pressure input from zone thermostats. It will select the highest pressure demand (cooling) and/or lowest pressure demand (heating) to operate final control elements.

Features

- Seven input manifold containing logic diaphragm, air filter, and restrictions
- Ten sharp barb connectors for all piping requirements
- Large integral filter assures clean air to the manifold
- Requires no field adjustment, and plastic construction results in minimum maintenance
- Two analyzers can be connected together to increase inputs to twelve

Description

The RP913A is a diaphragm logic pressure selector used in pneumatic control applications to select the highest and/or lowest branch pressure input from zone thermostats. It will select the highest pressure demand (cooling) and/or lowest pressure demand (heating) to operate final control elements.

Specifications

Model:
RP913A

Operating Temperature Range:
40 to 140F (4 to 60C)

Air Consumption:
0.04 scfm (0.019 L/s)

Supply Air Pressure
18 psi (124 kPa)

Maximum Air Pressure
25 psi (172 kPa)

Air Connections:
Ten sharp barb type of 1/4-in. OD plastic tubing ("M", "H", "L", "1-7" inputs). Plug unused output (H or L port)

Dimensions In Inches (Millimeters):

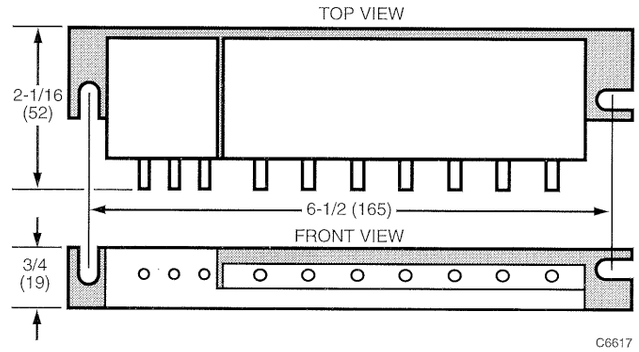

Honeywell

Helping You Control Your World

Home and Building Control
Honeywell Inc.
Honeywell Plaza
P.O. Box 524
Minneapolis, MN 55408-0524

Home and Building Control
Honeywell Limited-Honeywell Limitée
740 Ellesmere Road
Scarborough, Ontario
M1P 2V9

77-9378 MLF TAB: II. C. 5. Rev. 1-77

Printed in USA