

VN SERIES ZONE VALVES

The VN series zone valves and actuators are space-saving compact 2 or 3-way ball valves, factory assembled and tested with electronic rotary fail-in-place or electronic-fail-safe actuators.


Actuators provide 2-position or modulating control (with position feedback) of hot or chilled water with up to 50 % glycol in residential and commercial HVAC equipment. Optimized for cooling and heating in Fan coil units (FCU), Variable air volume (VAV), Unit heaters, Reheat coils, Radiators, and Chilled beam.



FEATURES AND BENEFITS

- 2 or 3-way valve configurations
- Available in 1/2, 3/4, and 1 inch sizes with internal (female) NPT connections
- Factory-fitted & tested valve and actuator assemblies
- Position feedback (0-10 VDC) on modulating models
- Fail-in-place & Electronic Fail-Safe actuators
- Open/Close time: < 40 Sec, E-fail Safe: 40 Sec
- IP 54
- Modulating (VN3) valves have characterized ports for equal percentage flow.
- Modulating (VN3) & 2-Position (VN8)
- Suitable Medium - Closed Loop Hot or Chilled Water, up to 50 % glycol
- Class II electric shock protection

DIMENSIONS

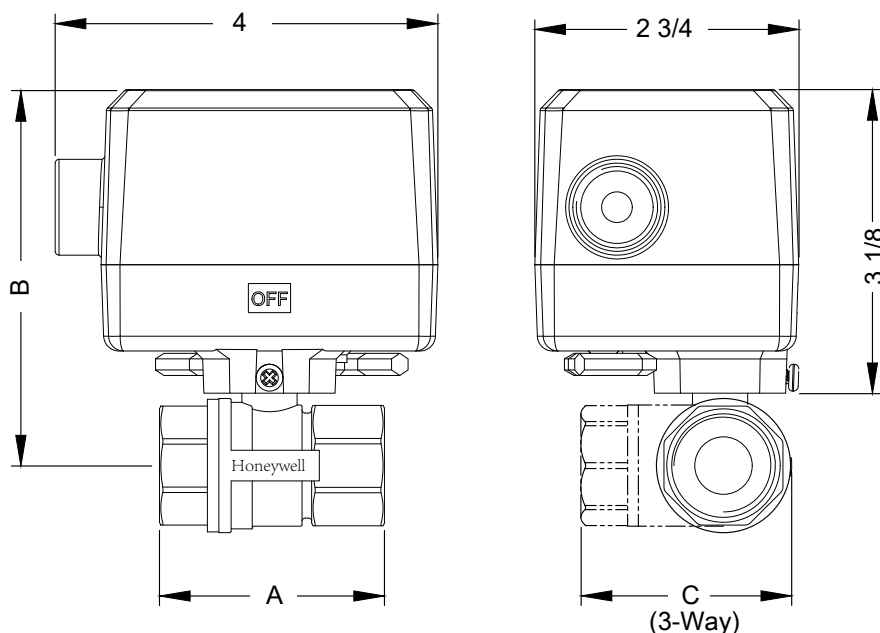

PATTERN	SIZE	DIMENSIONS (IN)		
		A	B	C
2-way	1/2 inch	2	3.9	-
	3/4 inch	2.4	3.9	-
	1 inch	2.6	4.1	-
3-way	1/2 inch	2.2	3.9	1.7
	3/4 inch	2.6	3.9	1.7
	1 inch	3.3	4.1	2.4

Honeywell

PRODUCT SPECIFICATION - ACTUATOR

ELECTRICAL

MODEL	PARAMETER		SPECIFICATION
Modulating Actuators (VN3)	Operating Voltage	Fail-in-place	24 VAC/DC $\pm$ 10%, 50/60 Hz, 3.5 VA
	Operating Voltage	Electronic Fail-safe	24 VAC/DC $\pm$ 10%, 50/60 Hz, 7.5 VA
	Control Mode		Modulating, Non-spring return
	Control Signal		0(2)–10 VDC (Input impedance 200 K Ω) 0(4)–20 mA DC (Input impedance 500 Ω)
	Control Signal Resolution		0.10 VDC
	Feedback Signal		0(2)–10 VDC (1 mA Max.)
Two-Position Actuators (VN8)	Operating Voltage	Fail-in-place (3-wire)	24 VAC $\pm$ 10%, 50/60 Hz, 3.5 VA 110 VAC $\pm$ 10%, 50/60 Hz, 3 VA 230 VAC $\pm$ 10%, 50/60 Hz, 7.5 VA
	Operating Voltage	Electronic Fail-safe (2-wire)	24 VAC/DC $\pm$ 10%, 50/60 Hz, 5.5 VA 100–240 VAC, 50/60 Hz, 9 VA
	Control Mode		On/Off type, Non-spring return
	Control Signal		3-wire (Three wire two control) 2-wire (Two wire one control)

OTHER SPECIFICATIONS

PARAMETER	DESCRIPTION
Wire specifications	18 AWG, flexible stranded
Operating Time	Open or close: $\leq$ 40 s
Electronic Fail-Return	Intervals: 45 s maximum
Electric Shock Protection	Class II
Operating Torque	27 lb-in (3 Nm)
Protection Rating	IP54
Electrical Insulation	Class 2

ENVIRONMENT

PARAMETER	SPECIFICATION
Operating Temperature	32 °F - 150 °F (0 °C - 65 °C)
Operating Relative Humidity	10 % - 95 % RH, non-condensing
Storage Temperature	-40 °F - 150 °F (-40 °C - 65 °C)
Storage Humidity	10 % - 95 % RH, non-condensing

PRODUCT SPECIFICATION - VALVE BODY

PARAMETER		DESCRIPTION
Applicable Medium		Closed Loop Hot or Chilled Water, up to 50 % glycol
Medium Temperature		32 °F - 200 °F (0 °C - 94 °C)
Nominal Pressure		PN20, 290 psi
Leakage Rate		0.05 % of Cv
Rangeability		30:1
Materials	Valve Body	Forged brass (HPb59-1)
	Valve Stem	Stainless steel (0Cr18Ni9)
	Ball Sealing	PTFE
	O-ring Seal	EPDM
	Valve Ball	Nickel plated brass (HPb59-1)



CALIFORNIA PROPOSITION 65 WARNING

This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.P65Warnings.ca.gov

ORDERING INFORMATION


2-WAY VALVES

CONTROL SIGNAL	VALVE PATTERN	VALVE CONNECTION	FLOW COEFFICIENT	RETURN	VOLTAGE	MODEL NUMBER	CLOSE-OFF
Modulating	2-way	1/2 inch, NPT	2.3	Fail-in-place	24 VAC/DC	VN32A15NTOL	87 psi
				Electronic Fail-Safe Closed		VN32A15NTEL	
				Electronic Fail-Safe Open		VN32A15NTFL	
		3/4 inch, NPT	3.7	Fail-in-place		VN32A20NTOL	
				Electronic Fail-Safe Closed		VN32A20NTEL	
				Electronic Fail-Safe Open		VN32A20NTFL	
		1 inch, NPT	6.6	Fail-in-place		VN32A25NTOL	
				Electronic Fail-Safe Closed		VN32A25NTEL	
				Electronic Fail-Safe Open		VN32A25NTFL	
Two-Position	2-way	1/2 inch, NPT	4.6	Fail-in-place	24 VAC	VN82A15NTOL	87 psi
					110 VAC	VN82B15NTOL	
					230 VAC	VN82C15NTOL	
				Electronic Fail-Safe Closed	24 VAC/DC	VN82A15NTEL	
					100-240 VAC	VN82B15NTEL	
					24 VAC/DC	VN82A15NTFL	
		3/4 inch, NPT	8.1	Electronic Fail-Safe Open	100-240 VAC	VN82B15NTFL	
					24 VAC	VN82A20NTOL	
					110 VAC	VN82B20NTOL	
					230 VAC	VN82C20NTOL	
				Electronic Fail-Safe Closed	24 VAC/DC	VN82A20NTEL	
					100-240 VAC	VN82B20NTEL	
					24 VAC/DC	VN82A20NTFL	
		1 inch, NPT	9.2	Electronic Fail-Safe Open	100-240 VAC	VN82B20NTFL	
					24 VAC	VN82A25NTOL	
					110 VAC	VN82B25NTOL	
					230 VAC	VN82C25NTOL	
				Electronic Fail-Safe Closed	24 VAC/DC	VN82A25NTEL	
					100-240 VAC	VN82B25NTEL	
					24 VAC/DC	VN82A25NTFL	
				Electronic Fail-Safe Open	100-240 VAC	VN82B25NTFL	

3-WAY VALVES

CONTROL SIGNAL	VALVE PATTERN	VALVE CONNECTION	FLOW COEFFICIENT	RETURN	VOLTAGE	MODEL NUMBER	CLOSE-OFF
Modulating	3-way	1/2 inch, NPT	3.7	Fail-in-place	24 VAC/DC	VN33A15NTOL	87 psi
				Electronic Fail-Safe Closed		VN33A15NTEL	
				Electronic Fail-Safe Open		VN33A15NTFL	
		3/4 inch, NPT	5.3	Fail-in-place		VN33A20NTOL	
				Electronic Fail-Safe Closed		VN33A20NTEL	
				Electronic Fail-Safe Open		VN33A20NTFL	
		1 inch, NPT	7.7	Fail-in-place		VN33A25NTOL	
				Electronic Fail-Safe Closed		VN33A25NTEL	
				Electronic Fail-Safe Open		VN33A25NTFL	
Two-Position	3-way	1/2 inch, NPT	4.9	Fail-in-place	24 VAC	VN83A15NTOL	87 psi
					110 VAC	VN83B15NTOL	
					230 VAC	VN83C15NTOL	
				Electronic Fail-Safe Closed	24 VAC/DC	VN83A15NTEL	
					100-240 VAC	VN83B15NTEL	
				Electronic Fail-Safe Open	24 VAC/DC	VN83A15NTFL	
					100-240 VAC	VN83B15NTFL	
		3/4 inch, NPT	9.2	Fail-in-place	24 VAC	VN83A20NTOL	
					110 VAC	VN83B20NTOL	
					230 VAC	VN83C20NTOL	
				Electronic Fail-Safe Closed	24 VAC/DC	VN83A20NTEL	
					100-240 VAC	VN83B20NTEL	
				Electronic Fail-Safe Open	24 VAC/DC	VN83A20NTFL	
					100-240 VAC	VN83B20NTFL	
		1 inch, NPT	16.2	Fail-in-place	24 VAC	VN83A25NTOL	
					110 VAC	VN83B25NTOL	
					230 VAC	VN83C25NTOL	
				Electronic Fail-Safe Closed	24 VAC/DC	VN83A25NTEL	
					100-240 VAC	VN83B25NTEL	
				Electronic Fail-Safe Open	24 VAC/DC	VN83A25NTFL	
					100-240 VAC	VN83B25NTFL	

PART NUMBER NOMENCLATURE

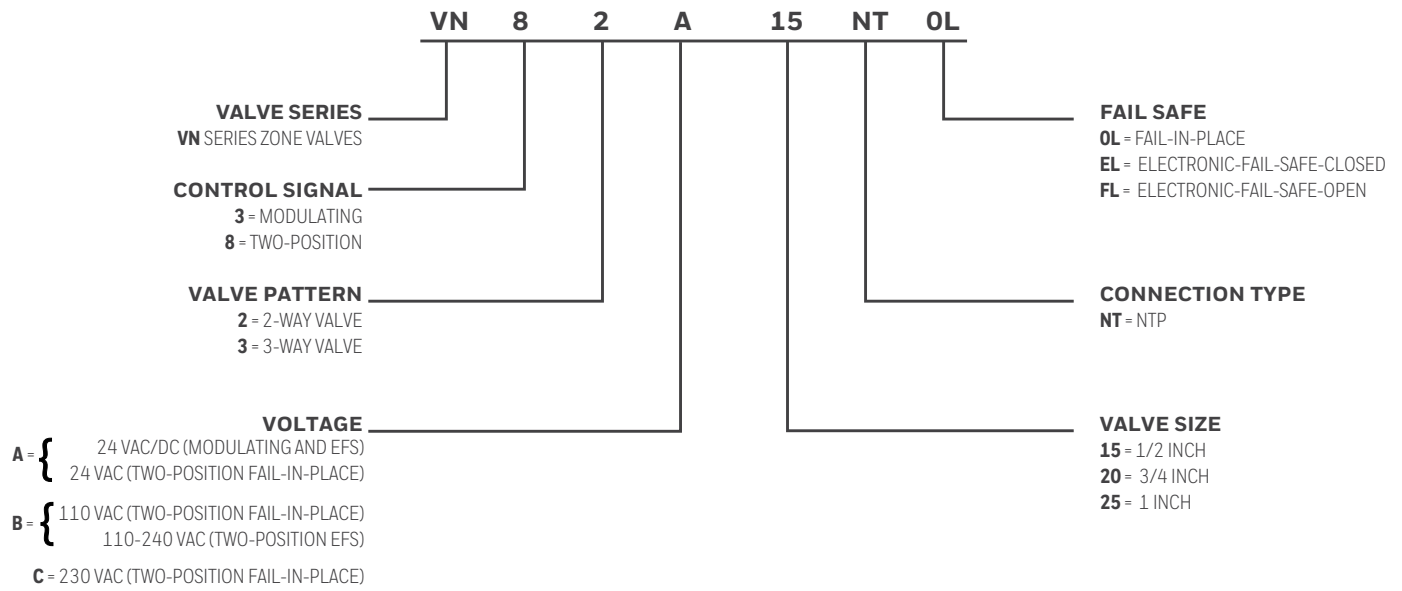


REPLACEMENT ACTUATOR


MODEL NUMBER	CONTROL SIGNAL	VOLTAGE	RETURN
VN3ZZA00TOL	Modulating	24 VAC/DC	Fail-in-place
VN3ZZA00TEL			Electronic Fail-Safe Closed
VN3ZZA00TFL			Electronic Fail-Safe Open
VN8ZZA00TOL	Two-position	24 VAC	Fail-in-place
VN8ZZA00TEL		24 VAC/DC	Electronic Fail-Safe Closed
VN8ZZA00TFL			Electronic Fail-Safe Open
VN8ZZB00TOL		110 VAC	Fail-in-place
VN8ZZB00TEL		100-240 VAC	Electronic Fail-Safe Closed
VN8ZZB00TFL			Electronic Fail-Safe Open
VN8ZZC00TOL		230 VAC	Fail-in-place

WIRING DIAGRAMS


MODULATING FAIL-IN-PLACE AND ELECTRONIC FAIL-SAFE

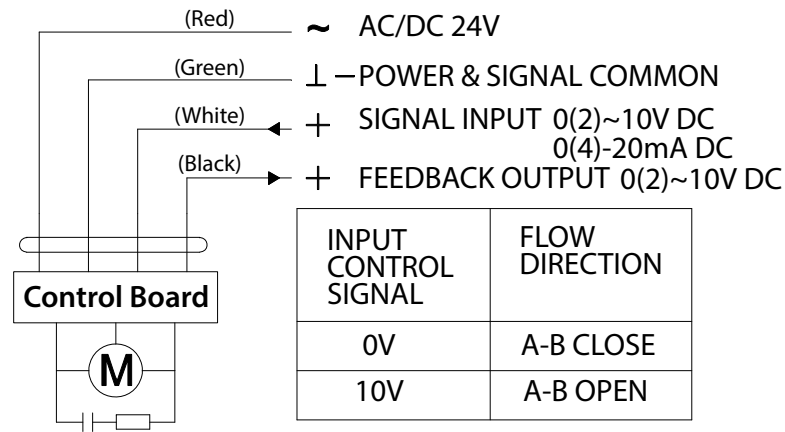


TWO-POSITION FAIL-IN-PLACE

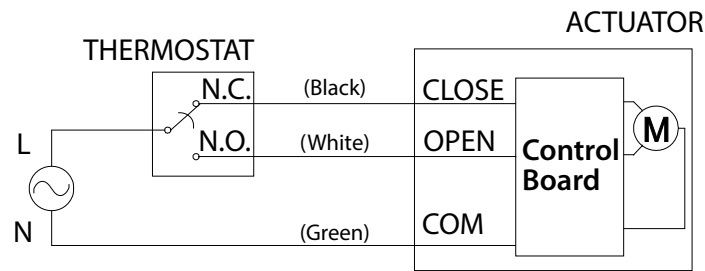

TWO-POSITION ELECTRONIC FAIL-SAFE CLOSED WIRING

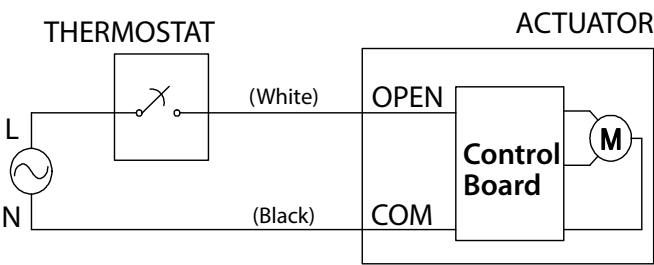

TWO-POSITION ELECTRONIC FAIL-SAFE OPEN WIRING

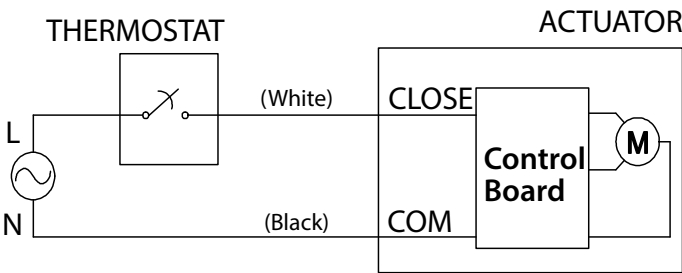

Find more information on VN series zone valves at <https://hwl.co/l2s8lv>



By using this Honeywell literature, you agree that Honeywell will have no liability for any damages arising out of your use or modification to, the literature. You will defend and indemnify Honeywell, its affiliates and subsidiaries, from and against any liability, cost, or damages, including attorneys' fees, arising out of, or resulting from, any modification to the literature by you.

Honeywell Building Technologies

715 Peachtree St NE
Atlanta, Georgia 30308
buildings.honeywell.com

@U.S. Registered Trademark
© 2023 Honeywell International Inc.
31-00600-03 | Rev. 11-23

