




ASME Expansion Tanks

Series B full acceptance pre-charged bladder tanks

Designed for closed hydronic heating and cooling systems

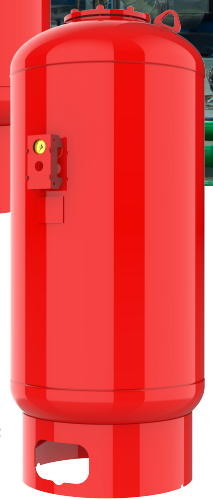

Description

Series B expansion tanks are ASME rated pre-charged bladder-type pressure vessels. The Series B tank is designed to absorb the expansion forces of heating/cooling system water while maintaining proper system pressurization under varying operating conditions. The heavy duty bladder contains system water thereby eliminating tank corrosion and waterlogging problems.

- Increases system performance
- Reduces oxygen corrosion
- Prevents waterlogging
- Replaceable bladder
- Integrated bladder integrity monitor on all models
- Designed and built according to ASME Section VIII, Division 1 standards
- 125 PSI working pressure standard
- High maximum operating temperatures
- Seismic restraints available
- Sight glass available
- Higher working pressure of 175 PSI & 250 PSI available

Operating data

- Maximum working pressure: 125 PSI (862 kPa)
- Maximum operating temperature: 240°F (115°C)
- Tanks are factory pre-charged at 40 PSI (276 kPa)

Materials of construction

- System connection: forged steel
- Shell: carbon steel
- Bladder: heavy duty butyl rubber
- Designed and constructed per ASME Section VIII, Division 1



Bell & Gossett
xylem


Series B full acceptance tanks

Dimensions

Model	Tank and acceptance	A	B	C FNPT	D FNPT	E	F	K	Shipping wt.	Flooded wt.*
	Gallons (liters)	Inches (mm)							lbs (lg)	
B35	10 (38)	12 (305)	23.5 (597)	3/4 (19)	N/A	10 (254)	0.14 (4)	N/A	40 (18)	123 (56)
B50	13 (49)	14 (356)	24 (610)	3/4 (19)	N/A	10 (254)	0.14 (4)	N/A	50 (23)	158 (72)
B85	23 (85)	16 (406)	37 (940)	3/4 (19)	1 (25)	12 (305)	0.14 (4)	5.5 (140)	90 (41)	273 (124)
B100	26 (100)	20 (508)	31 (787)	3/4 (19)	1 (25)	16 (406)	0.14 (4)	5.5 (140)	103 (47)	320 (145)
B130	34.4 (130)	20 (508)	37 (940)	3/4 (19)	1 (25)	16 (406)	0.14 (4)	5.5 (140)	125 (57)	408 (185)
B165	44 (165)	24 (610)	34 (864)	3/4 (19)	1-1/2 (38)	20 (508)	0.14 (4)	5.5 (140)	150 (68)	517 (235)
B-200	53 (200)	24 (610)	43 (1,092)	1-1/2 (38)	3/4 (19)	20 (508)	0.14 (4)	5.25 (133)	210 (95)	651 (295)
B-300	80 (300)	24 (610)	55 (1,397)	1-1/2 (38)	3/4 (19)	20 (508)	0.14 (4)	5.25 (133)	225 (102)	891 (404)
B-400	106 (400)	30 (762)	49 (1,245)	1-1/2 (38)	3/4 (19)	24 (610)	0.14 (4)	5.25 (133)	300 (136)	1,183 (537)
B-500	132 (500)	30 (762)	57 (1,448)	2 (50)	3/4 (19)	24 (610)	0.14 (4)	5.25 (133)	335 (152)	1,435 (651)
B-600	158 (600)	30 (762)	65 (1,651)	2 (50)	3/4 (19)	24 (610)	0.14 (4)	5.25 (133)	360 (163)	1,676 (760)
B-800	211 (800)	32 (813)	76 (1,930)	2 (50)	3/4 (19)	28 (711)	0.14 (4)	5.25 (133)	475 (215)	2,233 (1,013)
B-1000	264 (1,000)	36 (914)	76 (1,930)	1-1/2 (38)	3/4 (19)	30 (762)	0.14 (4)	N/A	552 (250)	2,751 (1,248)
B-1200	317 (1,200)	36 (914)	88 (2,235)	1-1/2 (38)	3/4 (19)	30 (762)	0.14 (4)	N/A	679 (308)	3,320 (1,506)
B-1400	370 (1,400)	36 (914)	100 (2,540)	1-1/2 (38)	3/4 (19)	30 (762)	0.14 (4)	N/A	688 (312)	3,770 (1,710)
B-1600	422 (1,600)	48 (1,219)	74 (1,880)	1-1/2 (38)	3/4 (19)	42 (1,067)	0.14 (4)	N/A	1,046 (474)	4,561 (2,068)
B-2000	528 (2,000)	48 (1,219)	86 (2,184)	1-1/2 (38)	3/4 (19)	42 (1,067)	0.20 (5)	N/A	1,150 (522)	5,548 (2,516)
B-2500	660 (2,500)	48 (1,219)	104 (2,642)	2 (50)	3/4 (19)	42 (1,067)	0.20 (5)	N/A	1,444 (655)	6,942 (3,148)
B-3000	792 (3,000)	48 (1,219)	124 (3,150)	2 (50)	3/4 (19)	42 (1,067)	0.20 (5)	N/A	1,658 (752)	8,255 (3,744)
B-3500	925 (3,500)	54 (1,372)	83 (2,108)	2 (50)	3/4 (19)	42 (1,067)	0.31 (8)	N/A	1,868 (847)	9,573 (4,341)
B-4000	1,057 (4,000)	60 (1,524)	105 (2,667)	2 (50)	3/4 (19)	54 (1,372)	0.31 (8)	N/A	2,238 (1,015)	11,043 (5,008)
B-5000	1,321 (5,000)	60 (1,524)	128 (3,251)	2 (50)	3/4 (19)	54 (1,372)	0.31 (8)	N/A	2,617 (1,187)	13,621 (6,177)
B-7500	1,980 (7,500)	72 (1,829)	131 (3,327)	3 (76)	1 (25)	66 (1,676)	0.31 (8)	N/A	3,768 (1,709)	20,261 (9,189)
B-10000	2,640 (10,000)	72 (1,829)	162 (4,115)	3 (76)	1 (25)	66 (1,676)	0.31 (8)	N/A	4,628 (2,099)	26,619 (12,072)
B-15000	3,963 (15,000)	72 (1,829)	233 (5,918)	3 (76)	1 (25)	66 (1,676)	0.31 (8)	N/A	5,925 (2,687)	38,937 (17,659)

Dimensions subject to change. Not to be used for construction purposes. Refer to submittals for optional seismic restraints.

*Approximate weight 100% full occurs if bag fails or if air charge is lost.

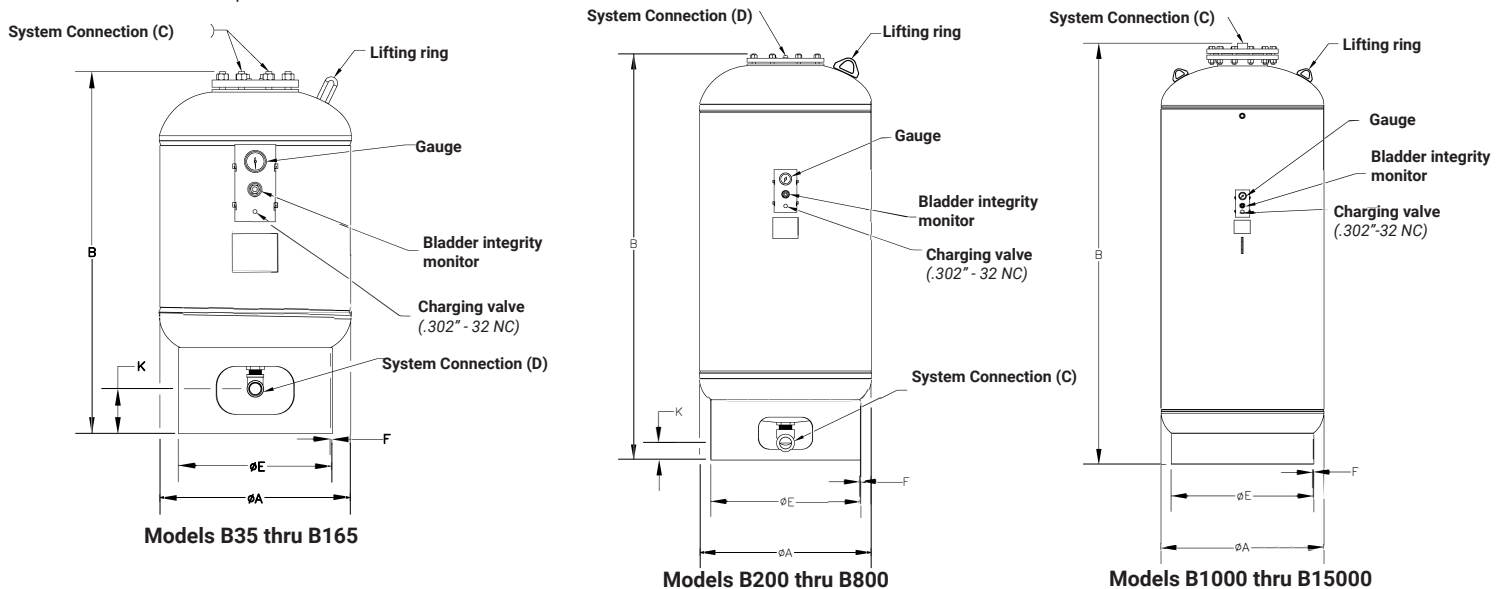


Xylem Inc.
 8200 N. Austin Avenue
 Morton Grove, Illinois 60053

Phone: (847) 966-3700
 Fax: (847) 965-8379
www.xylem.com/bellgossett

Subject to change without notice. All information presented herein is believed reliable and in accordance with accepted engineering practices. Xylem makes no warranties as to the completeness of this information. Users are responsible for evaluating individual product suitability for specific applications. Xylem assumes no liability whatsoever for any special, indirect or consequential damages arising from the sale, resale or misuse of its products.

© 2025 Xylem and Bell & Gossett are trademarks of Xylem, Inc. or one of its subsidiaries. All other trademarks are the property of their respective owners.

TB-A-350F 4/2025

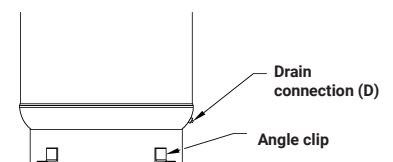

xylem
 Let's Solve Water