


# XPak<sup>®</sup>

NINETY PLUS

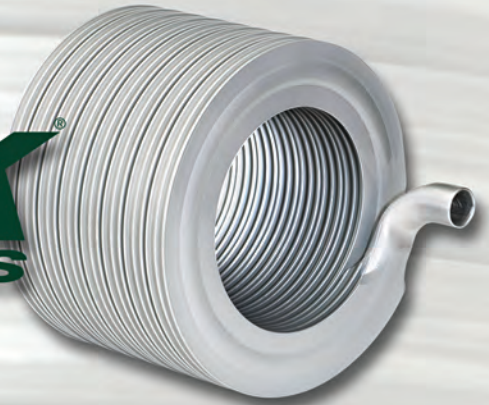

## Modulating- Condensing Wall Hung Boiler

### Extruded Aluminum Heat Exchanger

The XPak utilizes an extruded, single tube design made of 6063-T0 aluminum alloy for the heat exchanger. The pressure vessel is rated for 45PSIG and is ASME stamped and National Board registered. With over 250,000 units sold through-out Europe, you can depend on many years of trouble free operation. *That's what makes this boiler a Raypak!*

### Up to 4.4:1 Modulation

Infinitely modulating condensing design meets or exceeds Energy Star requirements. Zero governor gas valve with negative pressure gas regulator allows for greater installation flexibility in areas with low gas pressures. Burner is made from high grade, perforated stainless steel.

### 3-Speed Non-Ferrous Pump

Factory installed circulator with bypass and condensate siphon. Thermostatically controlled circulator maintains proper flow through the boiler.

### Electronic Direct Spark Ignition

### Natural Gas

A propane conversion kit is shipped with every unit.

### Easy to Install

Inlet and outlet water connections, gas and electrical connections and condensate drain are located on the bottom. Venting on the top allows this compact and lightweight boiler to mount easily onto walls without heavy bracing.

### 3" Venting - Flexible Options

- AL29-4C Stainless steel
- Polypropylene plastic
- CPVC plastic vent-coming soon!
- Concentric vent or twin penetrations
- Horizontal or vertical vent
- Direct vent ready

### Multi-Unit Capable

Optional multi-boiler controller available.

**up to 90.5% AFUE**

**XPak 85 • XPak 120**



*Xtreme performance powered by*

WWW.RAYPAK.COM



2151 Eastman Avenue  
Oxnard, CA 93030  
805-278-5300